


1 2 3 4 5 6 7 8

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ADT-LINK ANY
REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ADT-LINK IS PROHIBITED

版本 REV	变更内容 DESCRIPTION	变更号 ECN No.	日期 DATA
1.0	ISSUE	REL	2024-Sep-13

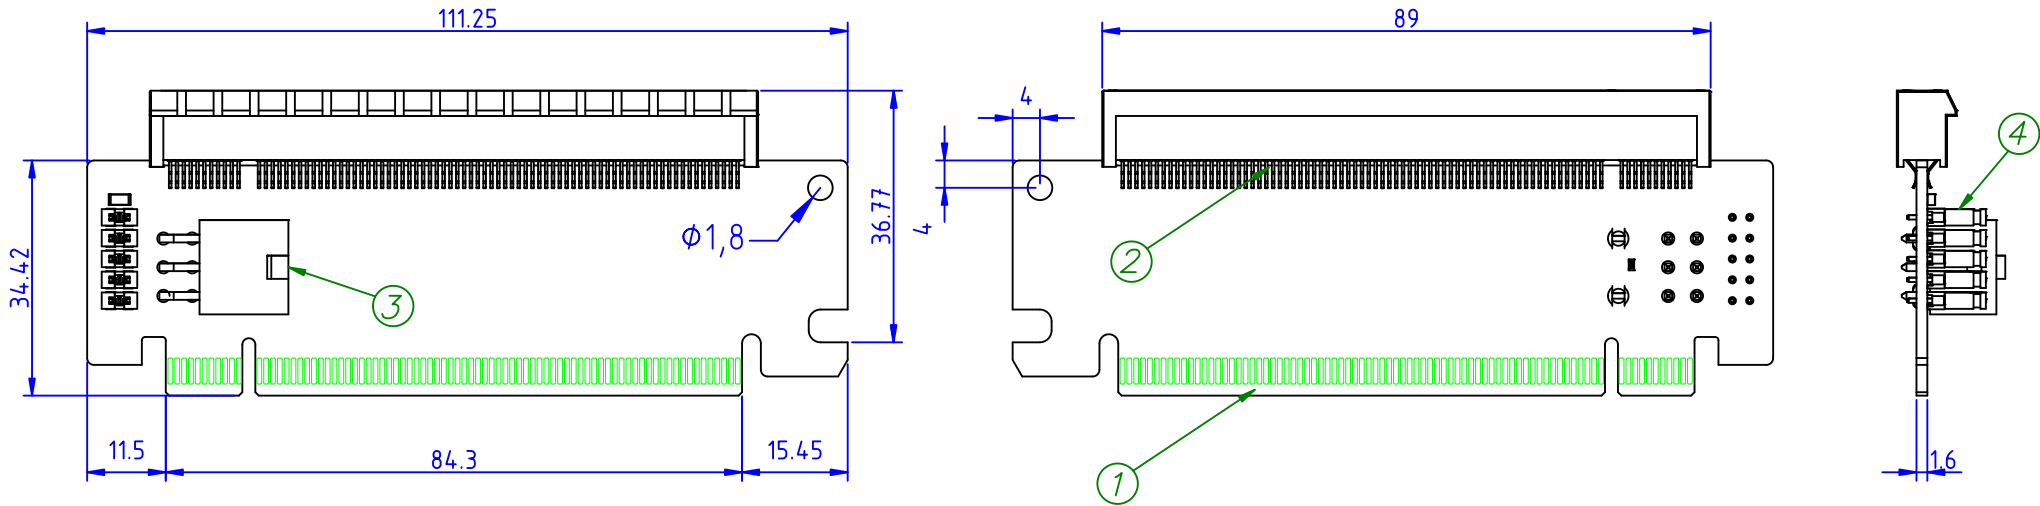

TOP VIEW

BOTTOM VIEW

3D VIEW

FEATURES:
PCIe x1 To M.2 NVME Adapter
Specification: PCIe 4.0 x4
Bandwidth: 32Gbps (Max.)
Function: PCIe x1 To M.2 NVME

PHYSICAL PROPERTIES:
Operation Temp. Range: -40°C to 80°C
Flammability rating: 94V-0

NOTE
1.100% OPEN/SHORT TEST.
2.DIMSION MARK "▼" BY QC CHECK



4	Connector	2 PIN JUMPER CAP	1Pcs
3	Connector	6 PIN POWER CONNECTOR	1Pcs
2	gold finger PCB	FR4 2 layer PCB, Black, GOLD FINGER 10u" , UL 94V-0	1Pcs
1	Connector	PCIe x16 164 PIN mount CONNECTOR	1Pcs
No.	PART NO.	DESCRIPTION	Q'TY

ADT-LINK

TITLE: PCIe x16 To PCIe x16 Adapter		DWG NO.: ADT-R33G		CUSTOMER NO. :		CUSTOMER P/N: R33G	
	SCALE NONE	UNIT mm	CUS REV. 1.0	ADT REV. 1.0	DATE 2024-Aep-13	SHEET 1/1	
DRAWING/制图 Liang		CHECKED/审核		APPROVED/核准			