


1 2 3 4 5 6 7 8

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ADT-LINK ANY
REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ADT-LINK IS PROHIBITED

版本 REV	变更内容 DESCRIPTION	变更号 ECN No.	日期 DATA
1.0	ISSUE	REL	2025-Apr.-22

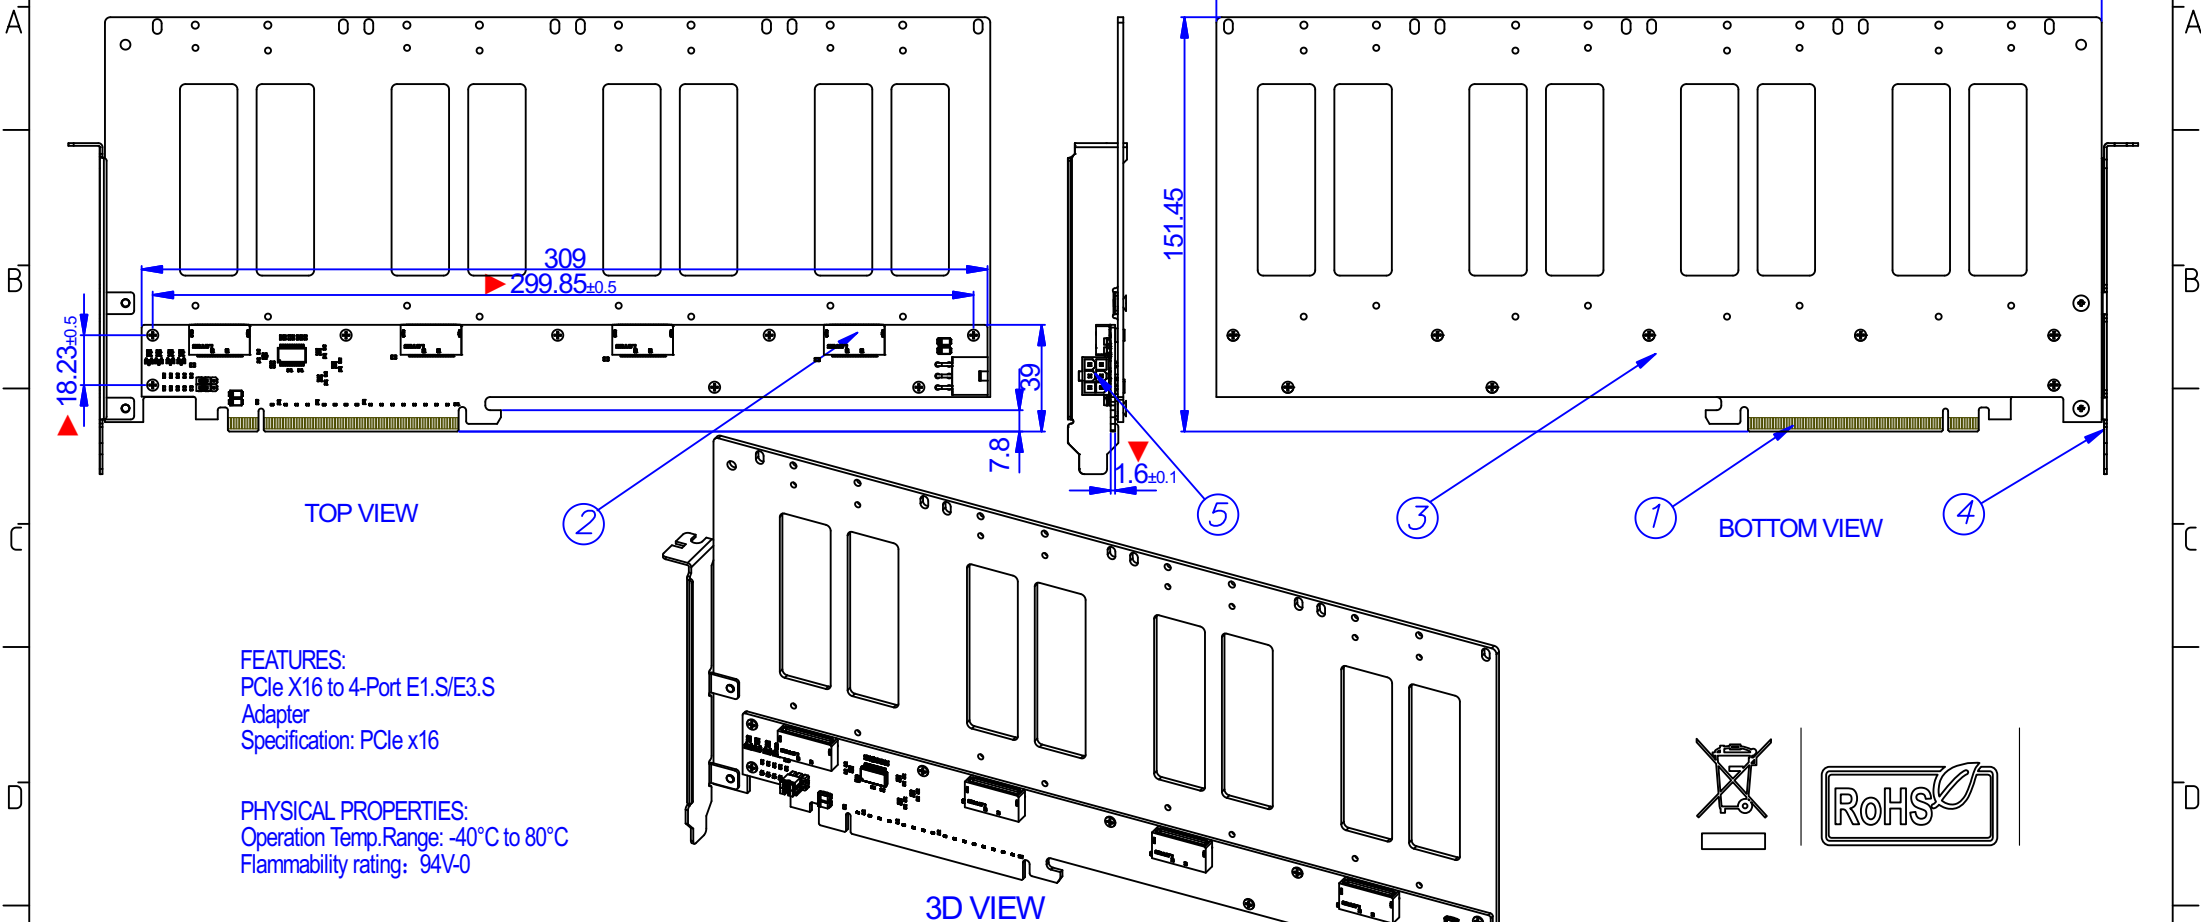

FEATURES:
PCIe X16 to 4-Port E1.S/E3.S
Adapter
Specification: PCIe x16

PHYSICAL PROPERTIES:
Operation Temp.Range: -40°C to 80°C
Flammability rating: 94V-0



3D VIEW

NOTE
1.100% OPEN/SHORT TEST.
2.DIMSION MARK "▼" BY QC CHECK.

6			
5	Connector	Graphics card, 6-pin bent pins, Positioning column,Positive buckle	1Pcs
4	Shield	Solid, Full-height, Black Baffle	1Pcs
3	Base	FR4, 2mm PCB BASE	1Pcs
2	Connector	Gen-Z R/A 1C Conn. SMT, Metal Key	4Pcs
1	Edge PCB	PCIe X16 CARD EDGE PCB , Black,ON GOLD FINGER, UL 94V-0	1Pcs
No.	PART NO.	DESCRIPTION	Q'TY

ADT-LINK

TITLE: PCIe X16 to 4-Port E1.S/E3.S Adapter

DWG NO.: ADT-R37D-001

CUSTOMER NO.: R37D-xxxxcm

CUSTOMER P/N: R37D

SCALE	UNIT	CUS REV.	ADT REV.	DATE	SHEET
NONE	mm	1.0	1.0	2025-Apr.-22	1/1

DRAWING/制图: Dane

CHECKED/审核

APPROVED/核准