


PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ADT-LINK ANY
REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ADT-LINK IS PROHIBITED

版本 REV	变更内容 DESCRIPTION	变更号 ECN No.	日期 DATA
1.0	ISSUE	REL	2025-Jun.-24

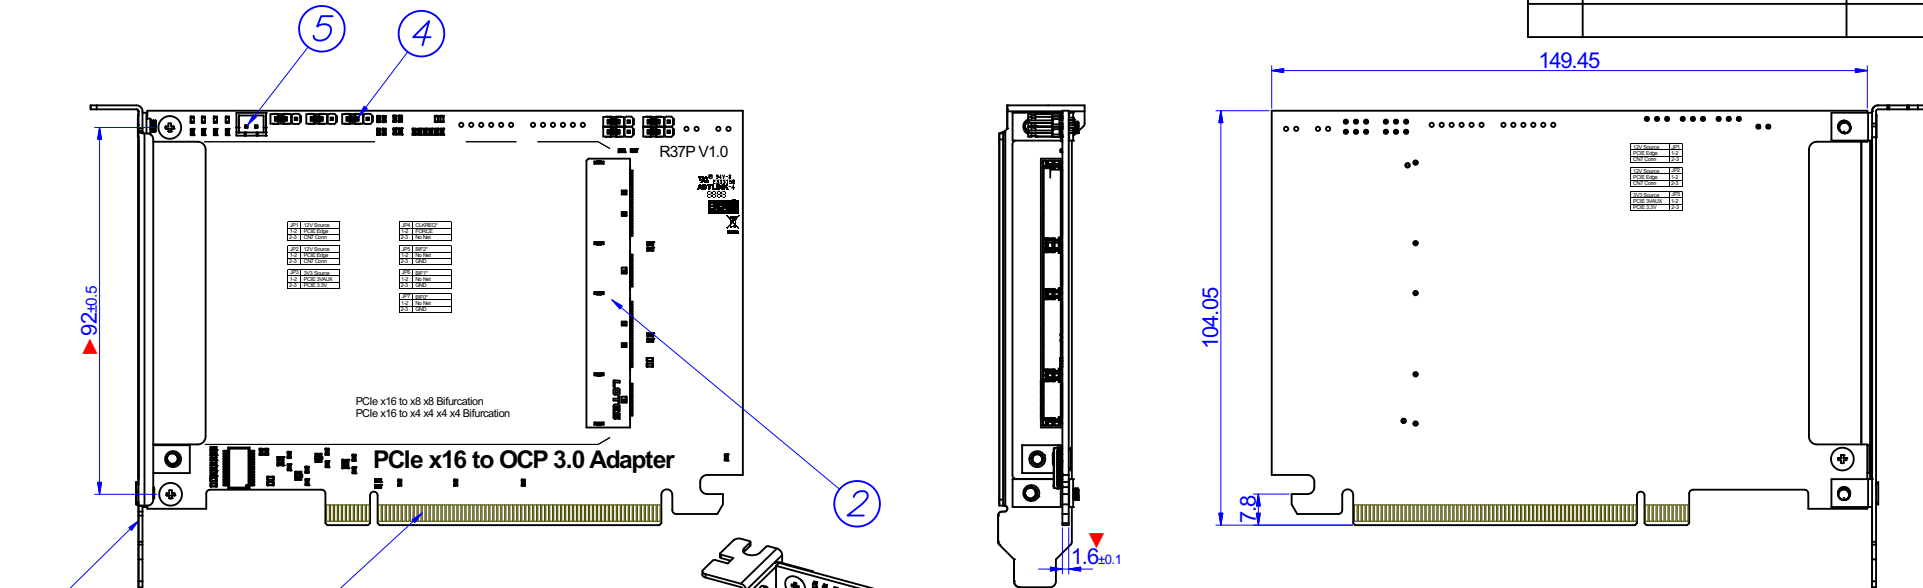

FEATURES:
PCIe X16 to 4C+ SFF-TA-1002
Adapter
Specification: PCIe x16

PHYSICAL PROPERTIES:
Operation Temp.Range: -40°C to 80°C
Flammability rating: 94V-0

3D VIEW

NOTE
1.100% OPEN/SHORT TEST.
2.DIMSION MARK "▼" BY QC CHECK.



No.	PART NO.	DESCRIPTION	Q'TY
5	Connector	XH 2P 2.54mm Pitch CONNECTOR	1Pcs
4	Cap	2 PIN JUMPER CAP	7Pcs
3	Shield	Solid, Full-height, Black Baffle	1Pcs
2	Connector	OCP Gen-Z 4C+ Right Angle CONN	1Pcs
1	Edge PCB	PCIe X16 CARD EDGE PCB , Black,ON GOLD FINGER, UL 94V-0	1Pcs

ADT-LINK									
TITLE: PCIe X16 to 4C+ SFF-TA-1002 Adapter						DWG NO.: ADT-R37P-001			
						CUSTOMER NO. : R37P-xxxxcm			
						CUSTOMER P/N: R37P			
	SCALE	UNIT	CUS REV.	ADT REV.	DATE	SHEET			
	NONE	mm	1.0	1.0	2025-Jun.-24	1/1			
DRAWING/制图 Dane			CHECKED/审核 June			APPROVED/核准 Taotie			