


**PROPRIETARY AND CONFIDENTIAL**  
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ADT-LINK ANY  
 REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ADT-LINK IS PROHIBITED

版本 REV	变更内容 DESCRIPTION	变更号 ECN No.	日期 DATE
1.0	ISSUE	REL	2024-May-29

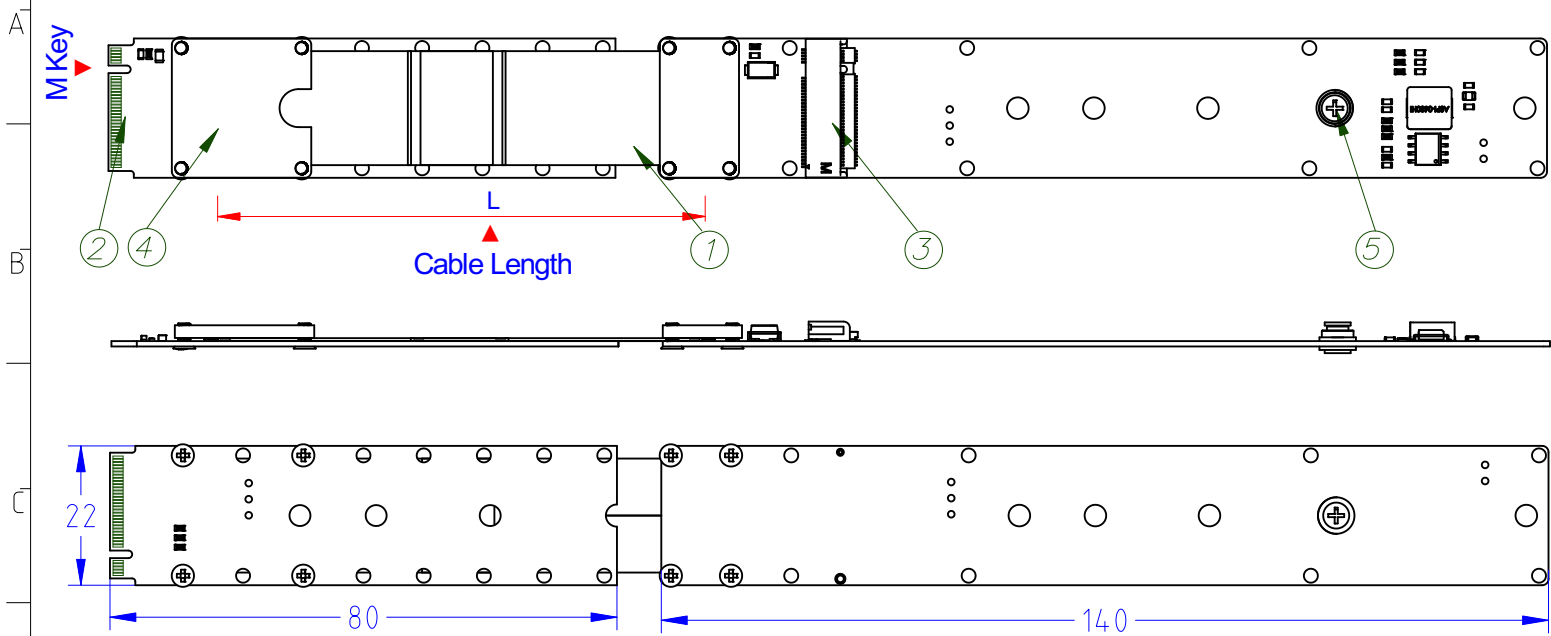


**FEATURES:**  
 M.2 NVMe SSD extension riser cable  
 Specification: M.2 NVMe

**PHYSICAL PROPERTIES:**  
 Operation Temp. Range: -40°C to 85°C  
 PAIR Cable Flammability rating: non (customize for VW-1)

**ELECTRONIC CHARACTERISTICS:**  
 1. CABLE IMPEDANCE: 90Ω±10%  
 2. DC Current Rating: PER PIN 0.5A  
 3. Voltage Rating: 30V  
 4. 導體規格: 厚度0.05mm 寬度0.3mm 鍍銀

**NOTE**  
 1. 100% OPEN/SHORT TEST.  
 2. DIMSION MARK "▼" BY QC CHECK.



F44AB-50cm	500±5
F44AB-25cm	250±5
Part-Number	Length (mm)

**ADT-Link**

TITLE: M.2 NVMe Card Riser Cable (Male to Female)

DWG NO.: ADT-F44AB-001

CUSTOMER NO.: F44AB-xxxxcm

CUSTOMER P/N: F44AB

SCALE	UNIT	CUS REV.	ADT REV.	DATE	SHEET
NONE	mm	1.0	1.0	2024-May-29	1/1

DRAWING/制图: Dane

CHECKED/审核: [Signature]

APPROVED/核准: [Signature]

No.	PART NO.	DESCRIPTION	QTY
5	Screw	M2 2280 screw	1 set
4	PAD	Aluminum 2mm PAD	2Pcs
3	Connector	M.2 3.2H 67PIN 0.5mm Pitch, M key, SMT, Top-Mount , R/A H/F connector	1Pcs
2	gold finger PCB	FR4 4 layer PCB, Black, GOLD FINGER 10u" , UL 94V-0	1Pcs
1	CABLE	18*0.5mm 35PIN FFC CABLE, Thickness 0.05mm width 0.3mm silver plated, DIFF 90Ω±10% Ohm Black	1Pcs
No.	PART NO.	DESCRIPTION	QTY