

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ADTLINK ANY
REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ADTLINK IS PROHIBITED

版本 REV	变更内容 DESCRIPTION	变更号 ECN No.	日期 DATA
1.0	ISSUE	REL	2024.Sep.05


A

B


C

D


E

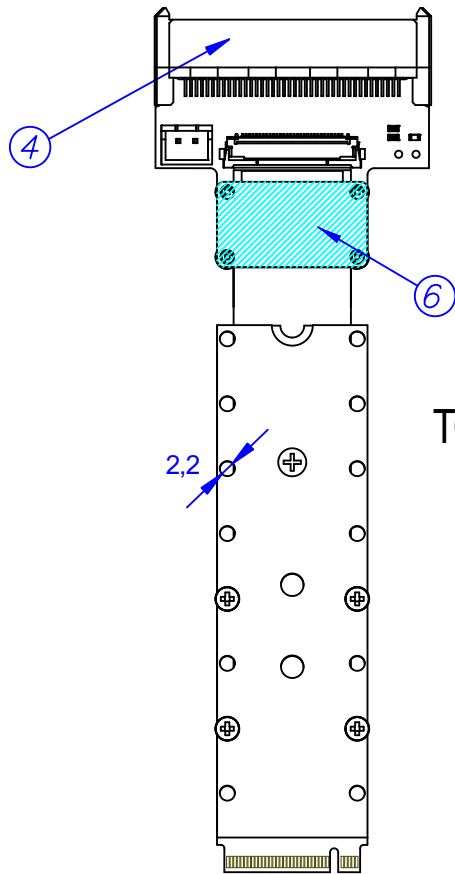


TOP VIEW

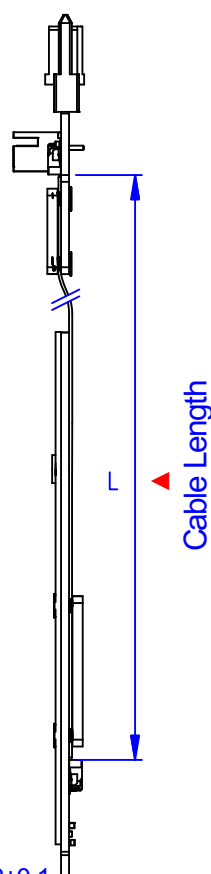

Cable Length

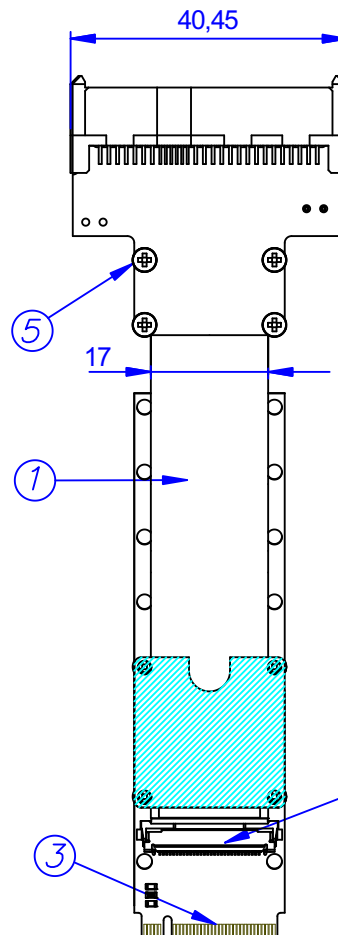

BOTTOM VIEW

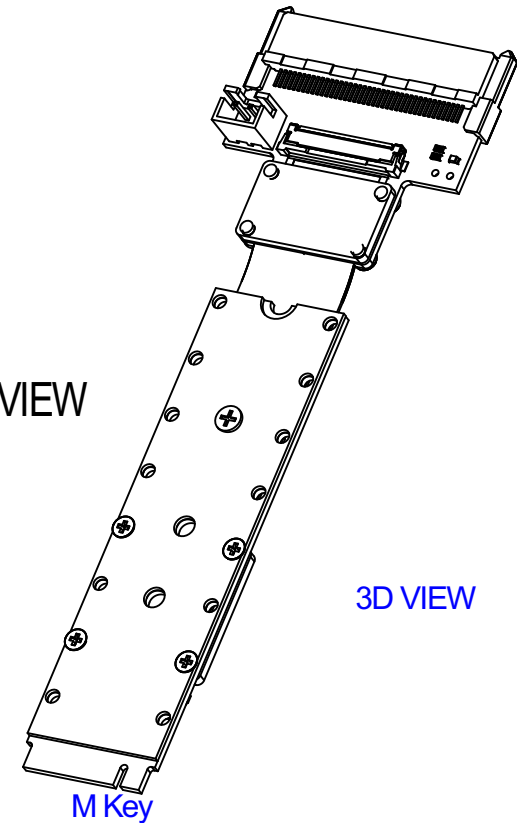

3D VIEW

M Key

ELECTRONIC CHARACTERISTICS:

1. CABLE IMPEDANCE: $90\Omega\pm10\%$
2. DC Current Rating: PER PIN 0.5A
3. Voltage Rating: 30V
4. Durability: 10 Cycles
5. 導體規格: 厚度0.05mm 寬度0.3mm鍍銀
6. FPC CONNECTOR I-PEX 20535-030E-02
7. 補強板內貼

FEATURES:

PCIE x4 extension riser cable
Specification: PCIE x4

PHYSICAL PROPERTIES:

Operation Temp.Range: -20°C to 80°C
PAIR Cable Flammability rating: non (customize for VW-1)


NOTE

- 1.100% OPEN/SHORT TEST.
- 2.DIMSION MARK "▼" BY QC CHECK



F47SF-50CM	500±20
F47SF-25CM	250±10
Part-Number	Length (mm)

ADT-Link

TITLE: M.2 NVMe to U.2 SFF-8639 Extension Flat CABLE				DWG NO.: ADT-F47SF-001			
				CUSTOMER NO.: F47SF-xxxxcm			
				CUSTOMER P/N: F47SF			
		SCALE	UNIT	CUS REV.	ADT REV.	DATE	SHEET
		NONE	mm	1.0	1.0	2024.Sep.05	1/1
DRAWING/制图			CHECKED/审核			APPROVED/核准	
Dane							

6	PAD	Aluminum 1.5mm PAD	2Pcs
5	Screw	M2 screw	8Pcs
4	Connector	U.2 SFF-8639 68Pin Receptacle,Straddle Mount	1Pcs
3	Edge PCB	M.2 NVMe CARD EDGE PCB, Black,with M key, ON GOLD FINGER, UL 94V-0	1Pcs
2	Connector	Auto-locking,high-speed, horizontal mate, 0.5 mm pitch shielded FFC/FPC connector	2Pcs
1	CABLE	17*0.5mm 30PIN FFC CABLE,Thickness 0.05mm width 0.3mm silver plated,DIFF 90Ω±10% Ohm Black	1Pcs
No.	PART NO.	DESCRIPTION	Q'TY