


MATERIAL MUST BE ACCORD WITH RoHS STANDARD



BOTTOM VIEW

TOP VIEW

**ELECTRONIC CHARACTERISTICS:**

Current Rating: 75W (Max.)  
 Voltage Rating: 3.3V ac(r.m.s) Max.  
 Spark test: 1200V  
 Dielectric strength test: Minimum 600V in 1 minute  
 Insulation resistance: Minimum 95MΩ-Km  
 Differential Impedance: 85Ω  
 Pair match impedance: ±15Ω

**FEATURES:**




Specification: M.2 NVMe key-M  
 Bandwidth: PCIe x4  
 Function: M.2 key-M extension cable

**PHYSICAL PROPERTIES:**


Operation Temp. Range: -20°C to 80°C  
 PAIR Cable Flammability rating: H:CMF

**NOTE**

- 100% OPEN/SHORT TEST.
- DIMENSION MARK "▼" BY QC CHECK.

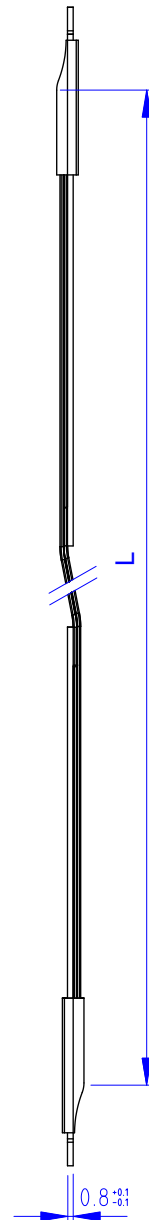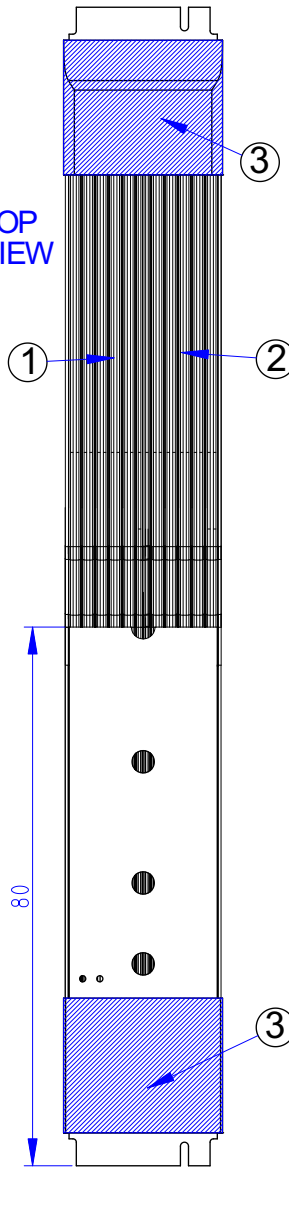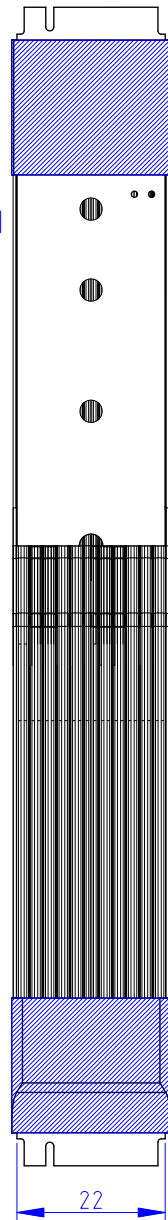


Cable Length

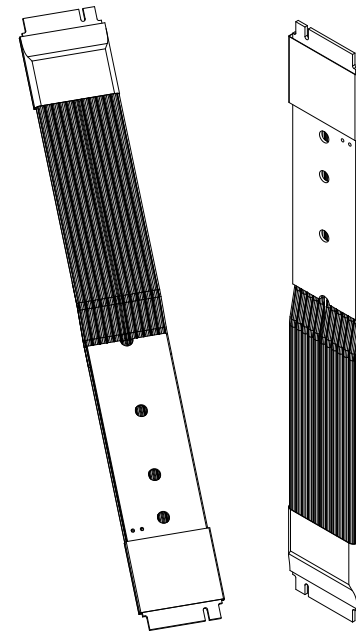

3D VIEW

版本 REV	变更内容 DESCRIPTION	变更号 ECN No.	日期 DATE
1.0	ISSUE	REL	2023-Nov-22



K44SS-50cm	500±20
K44SS-30cm	300±20
K44SS-20cm	200±10
K44SS-15cm	150±5
K44SS-10cm	100±5
Part-Number	Length (mm)

**ADT-Link**

TITLE:	DWG NO.:
PCIE 4.0 M.2 NVMe to x16 riser cable	ADT-K4S-K4S-xxxxcm
	CUSTOMER NO.:
	ADT
	CUSTOMER P/N:
	K44SS-TT , K44SS-TR

SCALE	UNIT	CUS REV.	ADT REV.	DATE	SHEET
NONE	mm	1.0	1.0	2023-Nov-22	1/1

DRAWING/制图: Gwydion  
 CHECKED/审核: \_\_\_\_\_  
 APPROVED/核准: \_\_\_\_\_

No.	PART NO.	DESCRIPTION	QTY
4			2Set
3	Tube	Heat shrink tube	2Pcs
2	CABLE	11.8*1.08mm TWIN-AX 35/30AWG*6PAIR CABLE, DIFF 85 Ohm,Silver	1Pcs
1	CABLE	9.8*1.08mm TWIN-AX 35/30AWG*5PAIR CABLE, DIFF 85 Ohm,Silver	1Pcs
No.	PART NO.	DESCRIPTION	QTY